

VITRO®

YU WAH STEEL (M) TRADING
SDN. BHD. (725598 - T)

VITRO® STYLISH GUTTER SYSTEM

Feature & Benefits

- Cost Effective
- Durable, High Strength, High Rigidity
- Prevent Splash Back
- Protects Fascia
- Reduced Maintenance



Flexible Design



Durability



Hi-Tech
Production



Thermal
Efficiency



Environmentally
Considerate



Warranty



Made In Malaysia



VITRO® Stylish Gutter System

With advances in modern technology. Rain Gutters today no longer come in tedious and lack of aesthetics. After a decade of study, Vitro® Stylish Gutter System is a combination of innovative, modern and stylish products. It provides an elegant, yet practical means for solving the challenging aspects of managing rain water. Our gutter is manufactured by ColourMaxx® Alpha Pre-painted In 5% Al-Mg Coated steel or Galvanised iron & stainless steel also available.

On top of normal PVC gutter, 10 years without much maintenance gives you no doubt on choosing your desired residential or commercial Rain Gutter.



Benefit of a Rain Gutter

The rain gutter is a roof drainage system that allows rainwater to be discharged or stored to a tank in an efficient manner.

- A good rain gutter will :
- Provides decorative detail
 - Increase overhang
 - Protects fascia
 - Protects roof edge
 - Prevent splash back
 - Protects plantings
 - Keeps sidewalks dry

Coating System Specification


- Pre-treatment :** Conversion coating is chemically applied to the ColourMaxx® Alpha to enhance the corrosion resistance and to ensure a secure bending surface for the paint films.
- Finish Coat & Backing Coat :** Comprehensive range of polyester based coatings available for indoor or outdoor use. Applied on top of exposed side with nominal thickness -20 microns. Backing Coat's thickness will be 5-7 microns.
- Primer Coat :** A corrosion inhibiting metal chromate primer applied with nominal film thickness 3-5 microns each side.

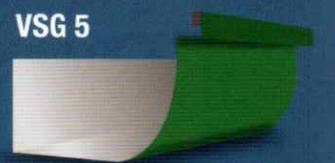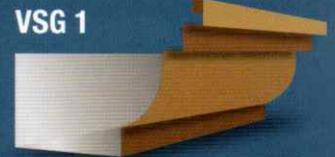


Gutter up to 7 meters per piece in length ensures less leakage with better aesthetic.



Installation Details

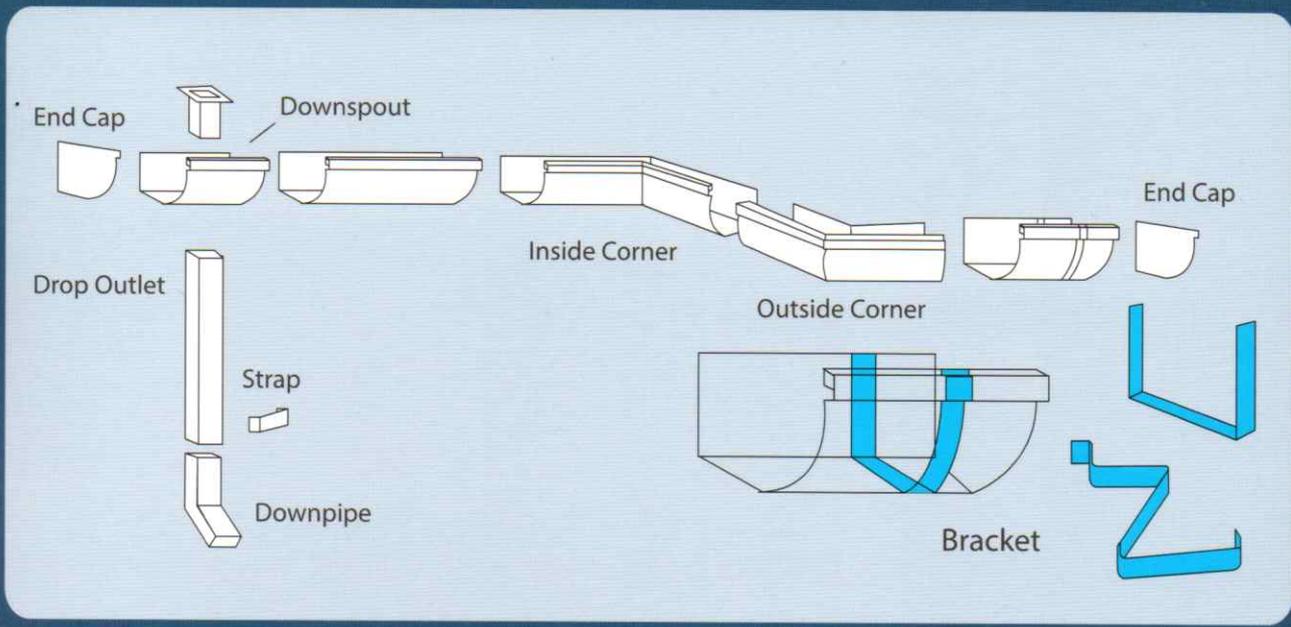

Gutter bracket spacing should mirror the spacing of the fascia bracket
600mm/ 900mm/ 1200mm

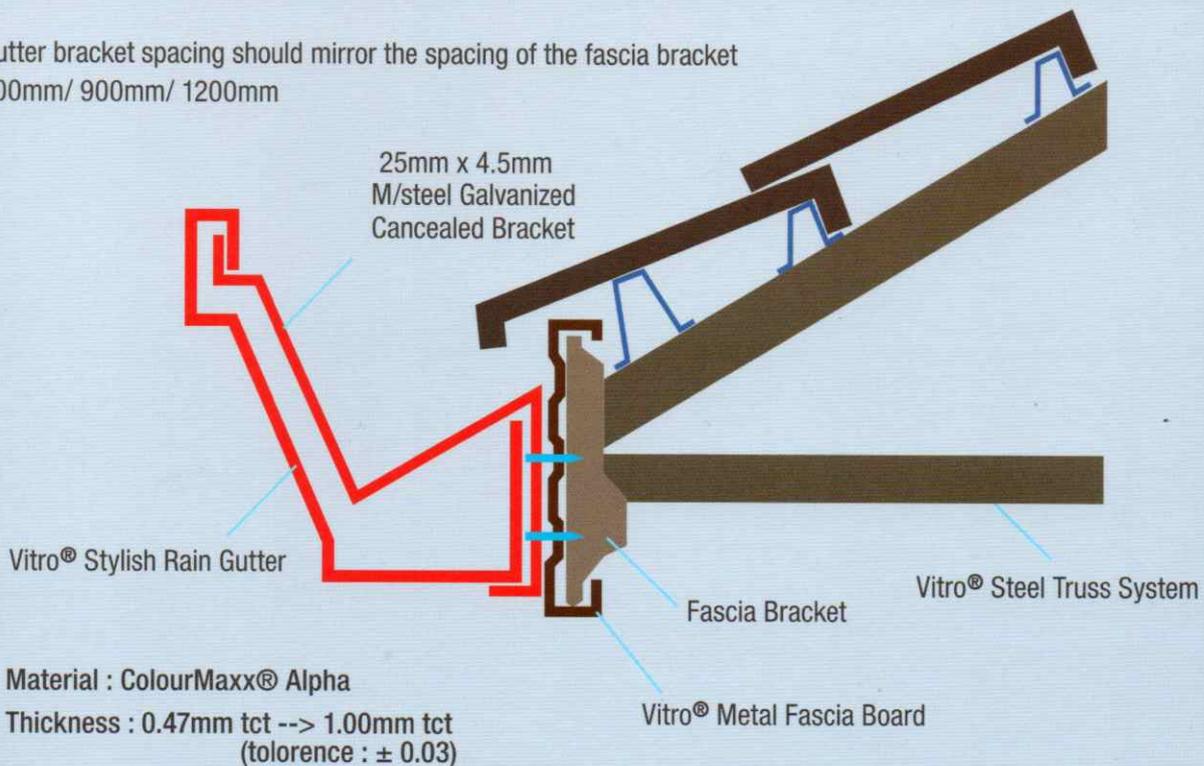


Material : ColourMaxx® Alpha

Thickness : 0.47mm tct --> 1.00mm tct
(tolerance : ± 0.03)

Flashing & Capping

We supply flashings and cappings standard or custom made.
The finish can be plain zincoat or colorcoat steel.

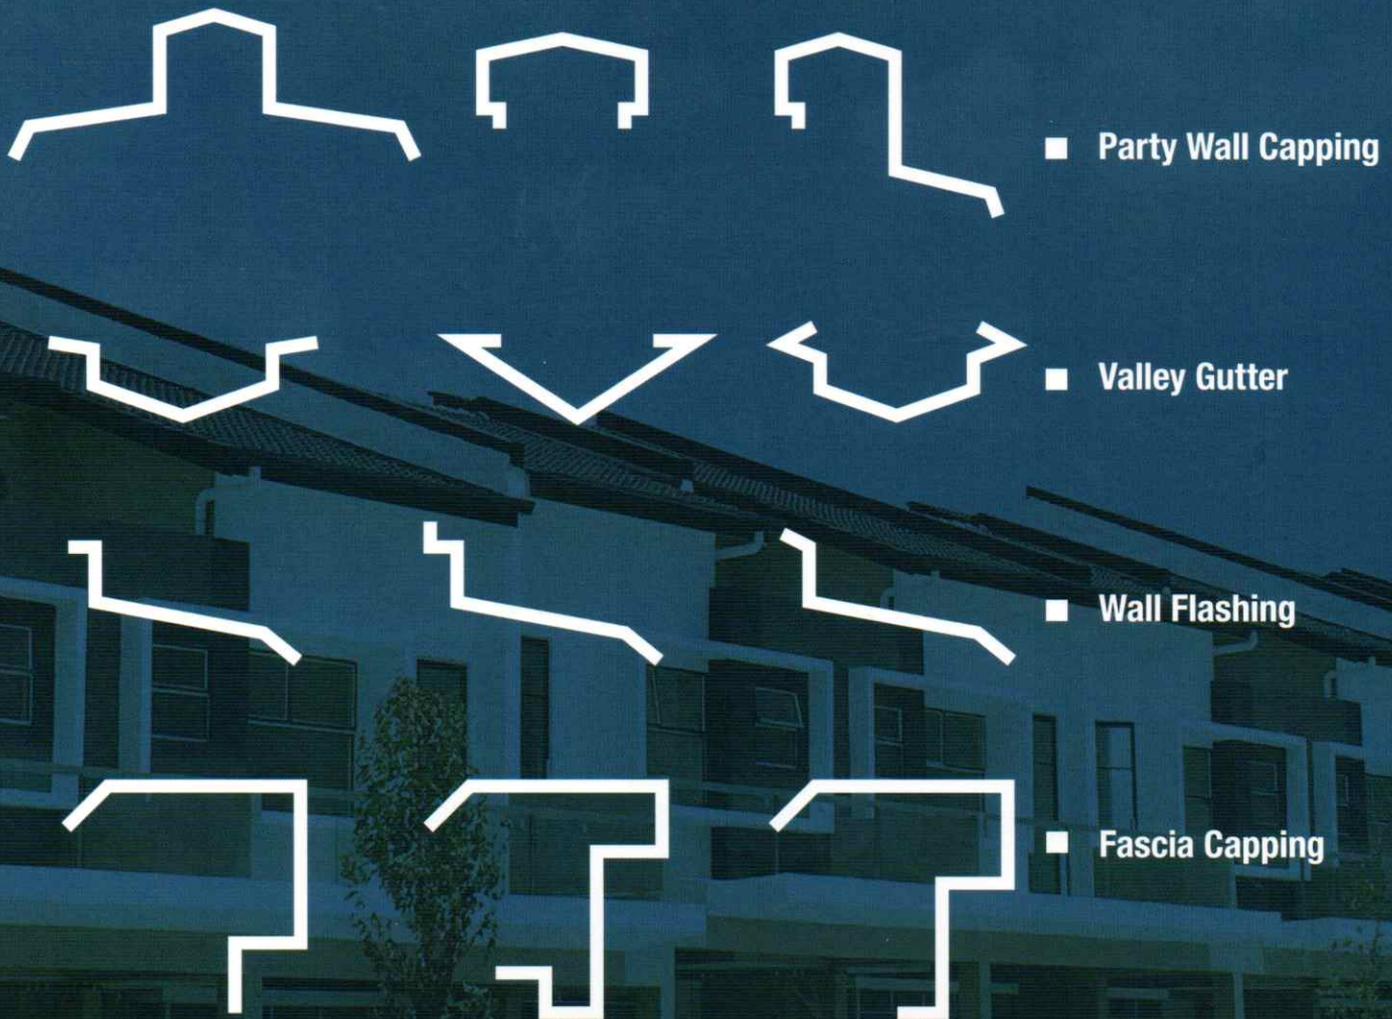

ColourMaxx® Alpha Coating System

